



SELF PRIMING PUMPS

FQ & FQD



FQ



FQD


FEATURES

- **Self priming pump** ; Priming required for initial use only.
- **Enclosed impeller ensures high efficiency**
- **Fast pumping action** ; Special designed casing provides very fast action.
- **BPO (back pull out) system** ; Over haul without suction/discharge pipe removal.
- **Non-overload design** ; Ensures stable performance for all applications
- **Sealed ball bearing** ; Eliminates need of lubrication.
- **Compact construction** ; The two-pole high speed motor provides a compact unit and minimizes installation area.
- **403 Stainless steel shaft** ; Portion of shaft contacting liquid is made of 403 stainless steel and is highly resistant to wear.

SELF PRIMING MULTI-STAGE PUMPS

FMQ


FMQ

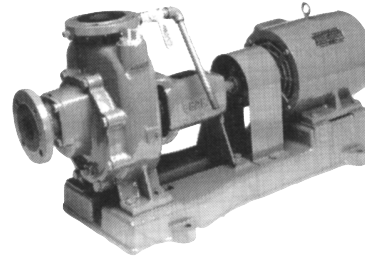

FEATURES

- Energy saving due to high efficiency
- Compact size
- Easy maintenance
- Robust self-priming design
- Higher head possible

SELECTION CHART

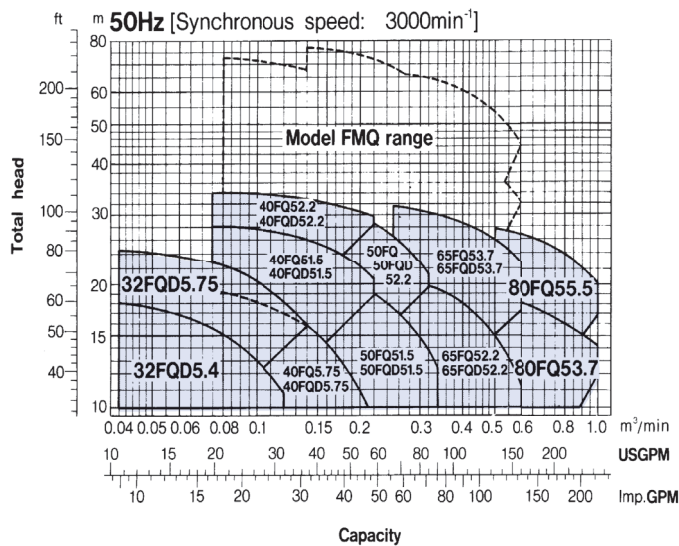

SELECTION CHART

3000 min⁻¹

