EBARA

END SUCTION VOLUTE PUMPS IBL

IBL

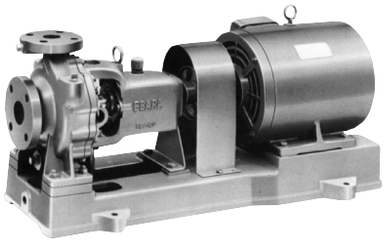

FEATURES

- Back Pull Out type - can be disassembled and inspected without removing the suction/discharge piping or the thermal insulation materials.
- High efficiency across a wide range of capacity.
- Can be used for suction pressure up to 7 kgf/cm2 (for detail, see selection charts)
- Quiet operation
- Conforms to Japanese Industrial Machinery Standard (JIMS) and International Standard.(ISO 2858)

SELECTION CHART

2 Pole 3000 min^{-1}

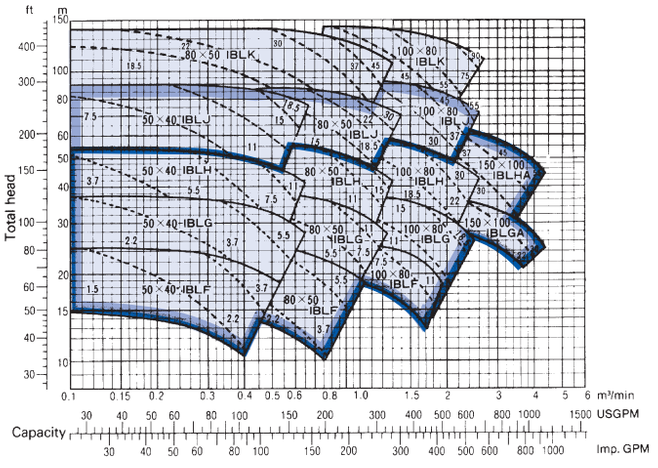

4 Pole 1500 min^{-1}

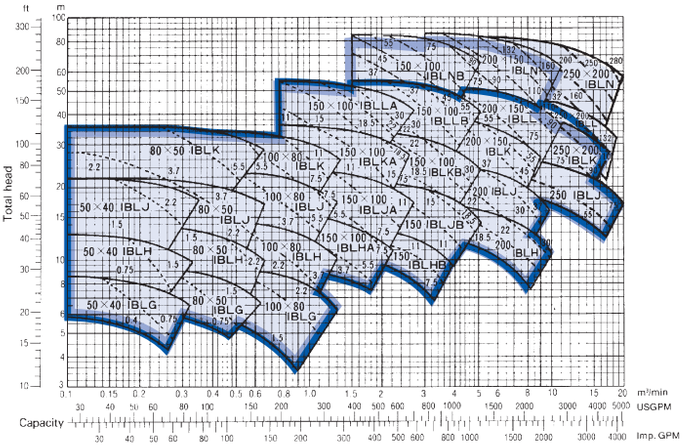

*1) Impeller material
Standard: ...Cast iron, Except ...Ductile cast iron
Option : ...Bronze, Except ... 304 stainless steel casting

*2) Shaft material
Standard: Except ...Carbon steel, ... Cr. Mo. steel
Option : 420 stainless steel

VERTICAL IN-LINE PUMPS LPD

LPD

FEATURES

- The two-pole speed system makes the pump compact, light weight and minimizes installation space.
- No floor space is required for installation.
- High allowable temperature (Max. 100^{O}C) and high suction pressure (Max. 0.69MPa) are available.
- Sealed ball bearing eliminates need of lubrication.
- Mechanical seal facilitates maintenance.

SELECTION CHART
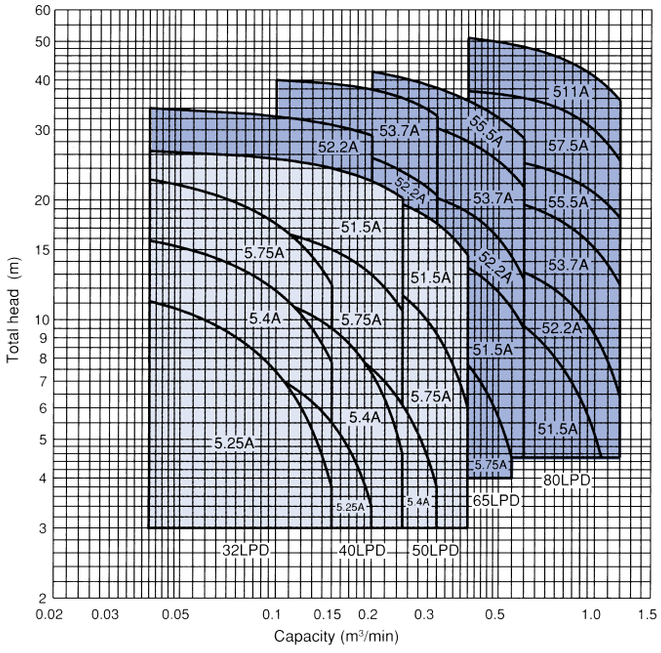
3000 min^{-1}